

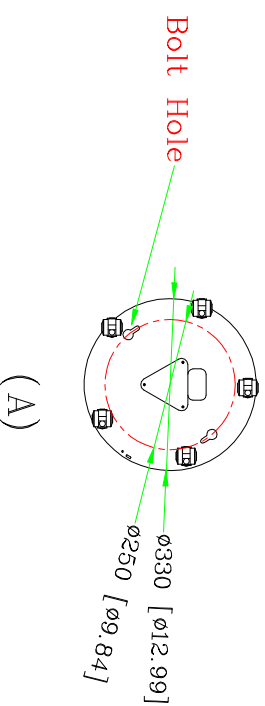
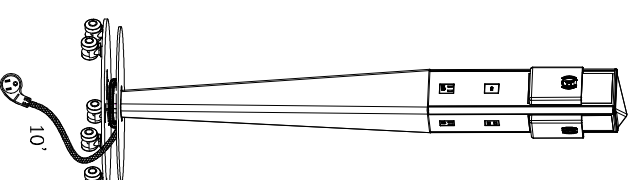


- SPECIFICATIONS**
- Scepter L: 39.05" Height
  - Steel base with aluminum body
  - Input ratings: 120C AC 60Hz, 12A
  - 10' 14 AWG x 3C 45 plug braided power cord
  - (3) AC 120V Tamper-Resistant outlets
  - (3) Qi wireless rapid chargers
  - (2) USB Type-A DC 5V charging modules (2 x 2.4A + 2 x 2.1A ports)
  - (1) 60W USB Type-C charging port (PD and QC enabled, up to 20V, 3A)
  - Wireless charging pockets with automatic alignment control
  - Casters included
  - Security slots and hardware included for permanent installation
  - UL and cUL certified

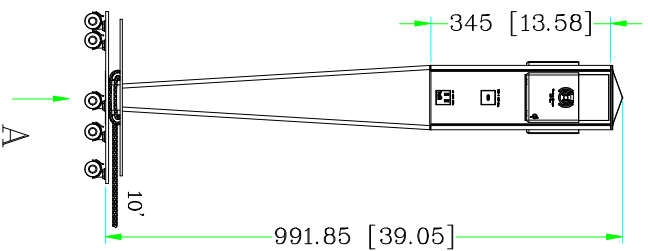

REV	DATE	DRAWN	APPROVED	DESCRIPTION							
TOLERANCE (mm [INCH])				DRAWN				YGY			
[mm]				[INCH]				DATE			
X	±2.5	XX	±0.1	CHECKED				DATE			
XX	±0.8	XXX	±0.03	APPROVED				DATE			
XXX	±0.25	XXXX	±0.010	PN				DOCK163216W-LICB-45° plug			
SCALE	VIEW	UNIT	SHEET	DRAWING#				REV			
1:10		mm[INCH]	1 OF 1	C-DK1600220318003				A			

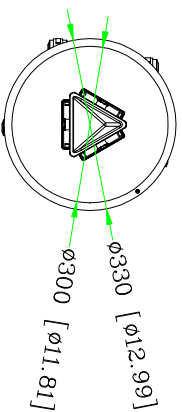