


Install screw: KA3\*12mm

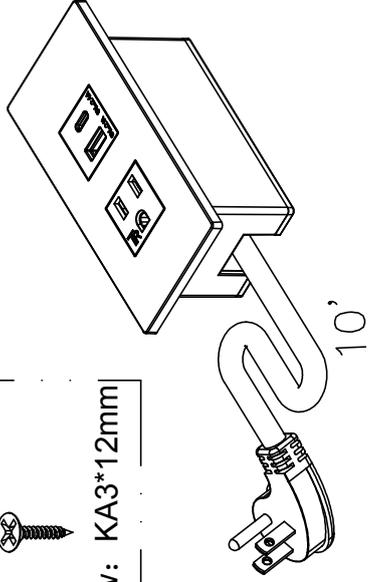

**Specifications:**

- (1) Tamper Resistant outlet
- 10' 14AWG\*3C power cord
- 5V DC 4.5A USB charger with 2 charging ports
- Rating: 125V 60Hz 15A

REV	DATE	DRAWN	APPROVED	DESCRIPTION			
				TOLERANCE (mm [INCH])			
				[mm]	[INCH]		
				X.X ±2.5	X.X ±0.1		
				X.XX ±0.8	X.XX ±0.03		
				X.XX ±0.25	X.XX ±0.010		
				SCALE	VIEW	UNIT	SHEET
				1:3	⊕	mm[INCH]	1 OF 1
						DRAWING#	REV
						C-DK1200LP11220515001	A

