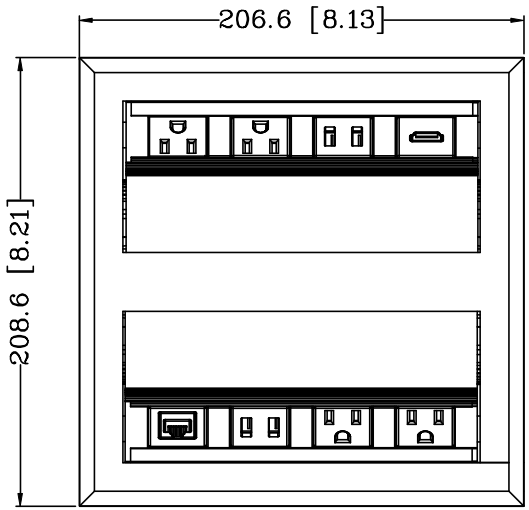

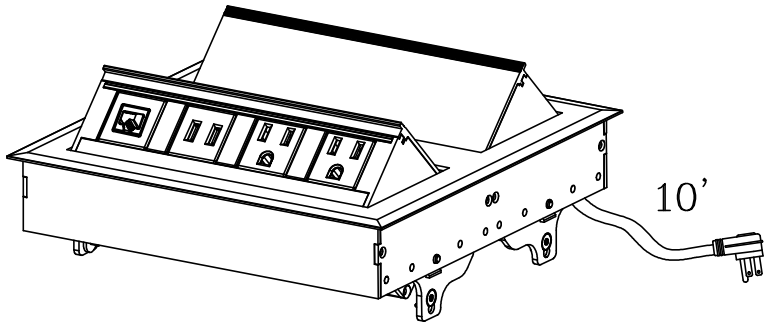

SPECIFICATIONS

- Dual-sided DOCK-700
- Aluminum housing
- 10' SJT 14 AWG x 3C power cord - 4 X grounded AC 125V receptacles with total of 12A max. output
- Overload protection
- Side 1:
    - 2 X grounded AC 125V receptacles
    - USB charger with 2 DC 5V charging ports, 4.2A max output
    - 1 X HDMI coupler
- Side 2:
    - 2 X grounded AC 125V receptacles
    - USB charger with 2 DC 5V charging ports, 4.2A max output
    - 1 X Ethernet (RJ-45) coupler

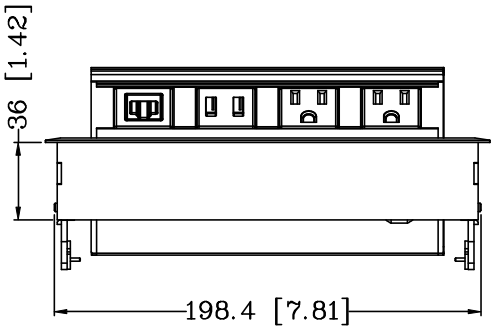

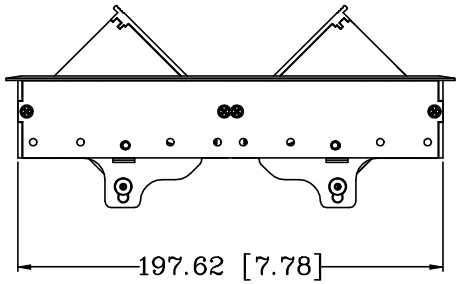

REV	DATE	DRAWN	APPROVED	DESCRIPTION

National Lighting®
www.nationallighting.net

TOLERANCE (mm [INCH])					
[mm] X ±2.5, X.X ±0.8, X.XX ±0.25		[INCH] X.X ±0.1, X.XX ±0.03, X.XXX ±0.010		DRAWN	YGY	DATE	Sept.28th 2018
				CHECKED	JBX	DATE	Sept.28th 2018
				APPROVED		DATE	
				PN	DOCK704-21010X-0X-12D		
SCALE	VIEW	UNIT	SHEET	DRAWING#			REV
1:1		mm[INCH]	1 OF 1	C-D720180928001			A