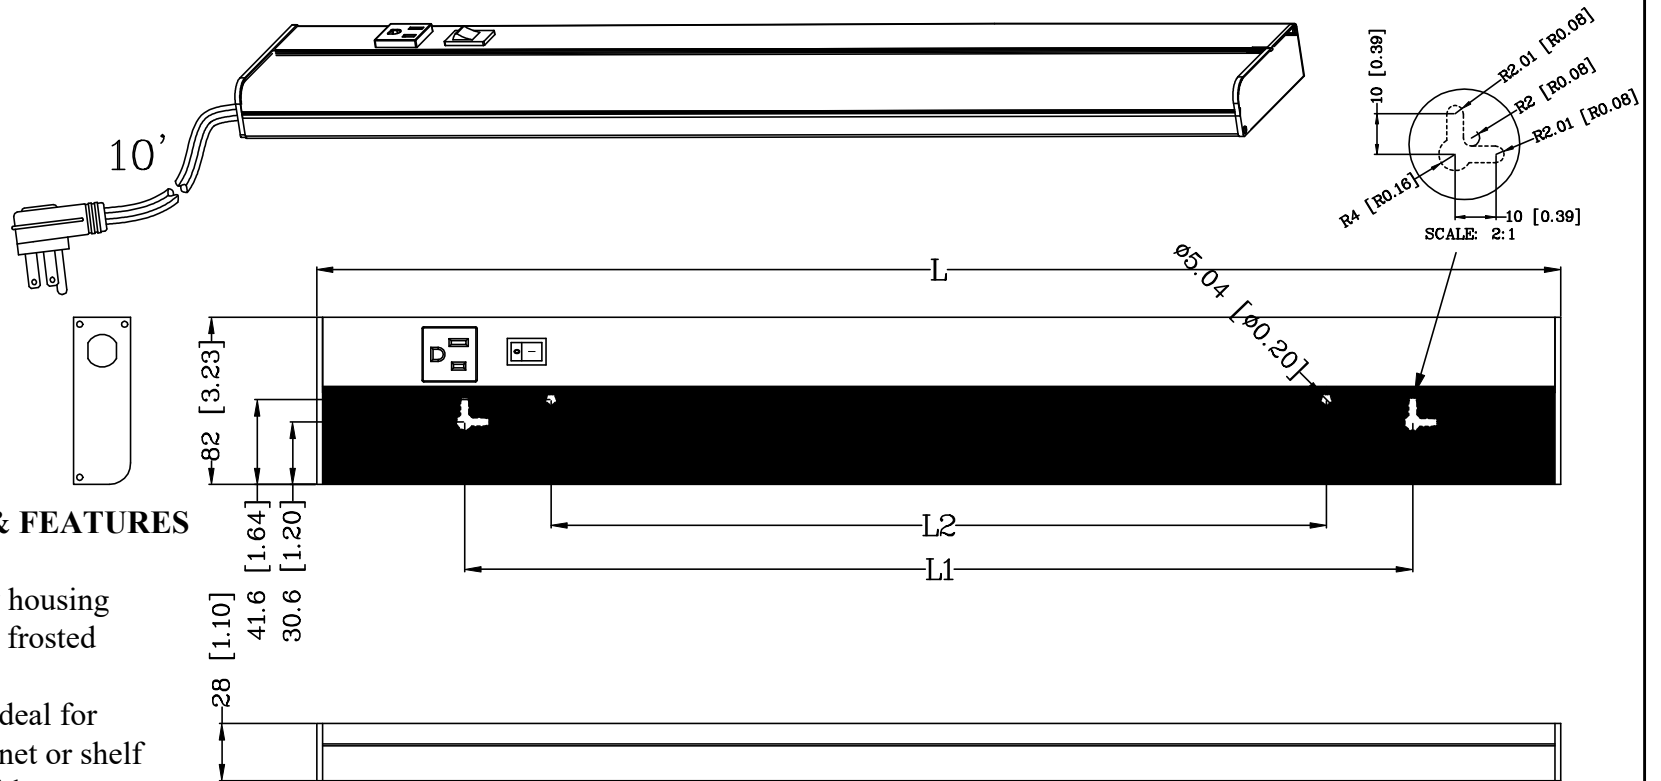




Part No.	Voltage	Wattage	Lumen		L(mm["'])	L1(mm["'])	L2(mm["'])
LEDTL-506W-18	AC 100-130V	6W	WW 300Lm	WH 320Lm	457.2[18]	312[12.28]	227.4[8.95]
LEDTL-508W-24		13W	WW 650Lm	WH 680Lm	609.6[24]	464.6[18.29]	380[14.96]
LEDTL-512W-36		16W	WW 800Lm	WH 840Lm	914.5[36]	769.5[30.3]	684.9[26.96]
LEDTL-516W-48		24W	WW 1200Lm	WH 1250Lm	1219.2[48]	1074[42.28]	989.4[38.95]



SPECIFICATIONS & FEATURES

- Solid aluminum alloy housing
- High impact-resistant frosted diffuser
- Slim surface mount, ideal for concealing under a cabinet or shelf
- Simple installation with two screws
- On/off rocker switch and convenience AC power outlet
- Expected lifespan of 50,000 hours
- Energy conservation over 80% compared to incandescent bulbs
- Maintenance free
- Optional magnet mounting for steel cabinet and showcase fixtures
- Available in black or white finish

REV	DATE	DRAWN	APPROVED	DESCRIPTION					
 www.nationallighting.net				TOLERANCE (mm [INCH])		DRAWN	YGY	DATE	Aug.4th 2017
				[mm]	[INCH]	CHECKED	JBX	DATE	Aug.4th 2017
				X ±2.5	XX ±0.1	APPROVED		DATE	
				XX ±0.8	XXX ±0.03	PN LEDTL-5 Series Task Light			
				XXX ±0.25	XXX ±0.010				
SCALE	VIEW	UNIT	SHEET	DRAWING#			REV		
1:1		mm[INCH]	1 OF 1	C-TL5-0001			A		