


SPECIFICATIONS:

- *Bendable design for curved applications
- *Trimable at any length
- *Lumen output: 288 Lm/ft max.
- *Flexible housing: Silicone
- *Shatterproof design
- *Easily daisy chained to additional units through accessory pack
- *Mounting clips included in the accessory pack
- *Expected lifespan of 50,000 hours
- *Input:DC 24V
- *CRI: 90+
- *CCT:3000K/5000K

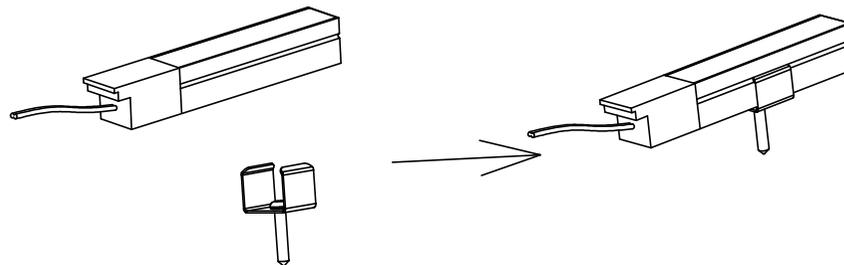

Installation instruction

REV	DATE	DRAWN	APPROVED	DESCRIPTION					
				TOLERANCE (mm [INCH])		DRAWN	ZDL	DATE	Aug.17th 2025
				[mm]	[INCH]	CHECKED	JBX	DATE	Aug.29th 2025
				X. ±2.5 X.X ±0.8 X.XX ±0.25	X.X ±0.1 X.XX ±0.03 X.XXX ±0.010	APPROVED		DATE	
				SCALE	VIEW	UNIT	SHEET	PN	LEDS-FLX-787-24XX
1:1		mm[INCH]	1 OF 1	DRAWING#	C-FLX787250829001	REV	Qa		