



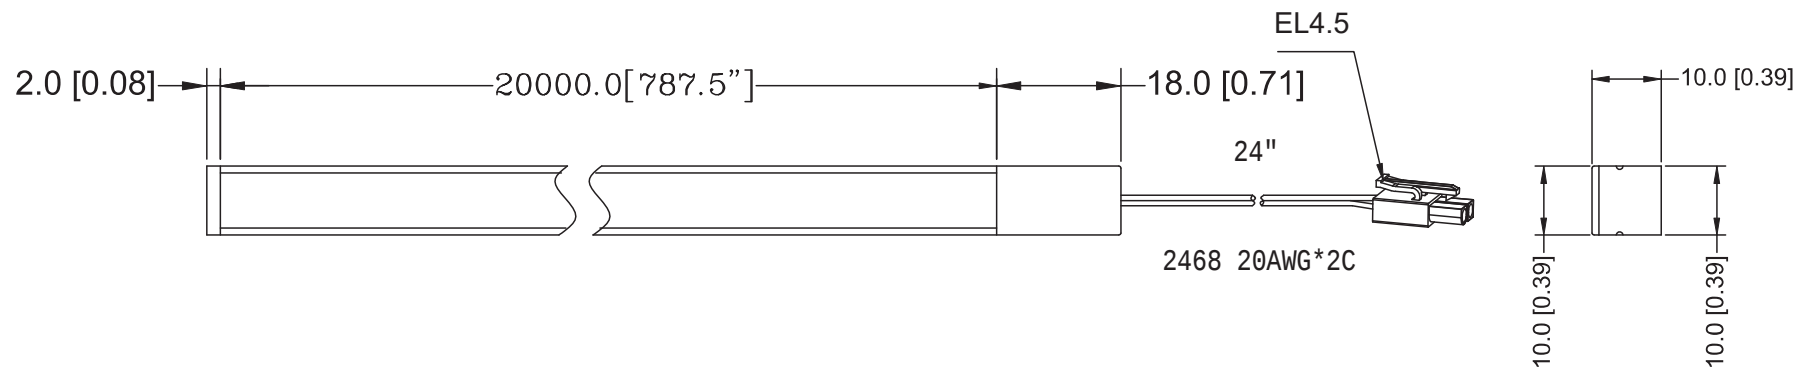

SPECIFICATIONS:

- *Bendable design for curved applications
- *Trimable at any length
- *Lumen output: 288 Lm/ft max.
- *Flexible housing: Silicone
- *Shatterproof design
- *Easily daisy chained to additional units through accessory pack
- *Mounting clips included in the accessory pack
- *Expected lifespan of 50,000 hours
- *Input:DC 24V
- *CRI: 90+
- *CCT:3000K/5000K

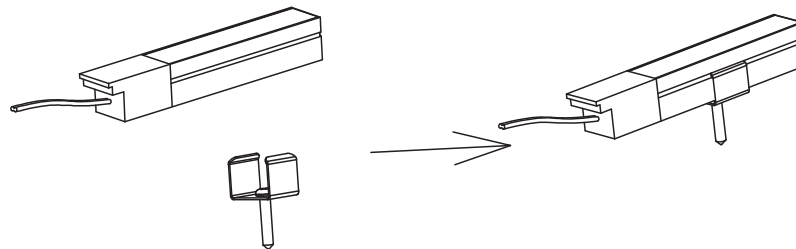

Installation instruction

REV	DATE	DRAWN	APPROVED	DESCRIPTION																																																									
MOD[®] POWER & LIGHTING SOLUTIONS www.MOD-PLS.com <table><tr><td colspan="2">TOLERANCE (mm [INCH])</td><td>DRAWN</td><td>ZDL</td><td>DATE</td><td>Aug.17th 2025</td></tr><tr><td>[mm]</td><td>[INCH]</td><td>CHECKED</td><td>JBX</td><td>DATE</td><td>Aug.29th 2025</td></tr><tr><td>X. ±2.5</td><td>X.X ±0.1</td><td>APPROVED</td><td></td><td>DATE</td><td></td></tr><tr><td>X.X ±0.8</td><td>X.XX ±0.03</td><td colspan="2">PN</td><td colspan="2">LEDS-FLX-787-24XX</td></tr><tr><td>X.XX ±0.25</td><td>X.XXX ±0.010</td><td colspan="2">SCALE</td><td colspan="2">VIEW</td></tr><tr><td colspan="2"></td><td colspan="2">UNIT</td><td colspan="2">SHEET</td></tr><tr><td colspan="2"></td><td colspan="2">DRAWING#</td><td colspan="2">REV</td></tr><tr><td>1:1</td><td></td><td>mm[INCH]</td><td>1 OF 1</td><td colspan="2">C-FLX787250829001</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">Qa</td></tr></table>				TOLERANCE (mm [INCH])		DRAWN	ZDL	DATE	Aug.17th 2025	[mm]	[INCH]	CHECKED	JBX	DATE	Aug.29th 2025	X. ±2.5	X.X ±0.1	APPROVED		DATE		X.X ±0.8	X.XX ±0.03	PN		LEDS-FLX-787-24XX		X.XX ±0.25	X.XXX ±0.010	SCALE		VIEW				UNIT		SHEET				DRAWING#		REV		1:1		mm[INCH]	1 OF 1	C-FLX787250829001						Qa					
				TOLERANCE (mm [INCH])		DRAWN	ZDL	DATE	Aug.17th 2025																																																				
				[mm]	[INCH]	CHECKED	JBX	DATE	Aug.29th 2025																																																				
				X. ±2.5	X.X ±0.1	APPROVED		DATE																																																					
				X.X ±0.8	X.XX ±0.03	PN		LEDS-FLX-787-24XX																																																					
				X.XX ±0.25	X.XXX ±0.010	SCALE		VIEW																																																					
						UNIT		SHEET																																																					
		DRAWING#		REV																																																									
1:1		mm[INCH]	1 OF 1	C-FLX787250829001																																																									
				Qa																																																									